

# Peltier - Cooled Incubator - ILP115

## DATA SHEET



The photo above is for reference only, may show additional options not included in standard equipment.  
The real appearance, particularly color and structure of the material may differ from the ones presented in the photo.

### TECHNICAL DATA

air convection	forced
chamber capacity [l] /1/	112
working capacity [l]	112
controller	microprocessor with external LCD graphic display

### TEMPERATURE

temperature range [°C]	+15...+70 (+100 for TOP+ version)
temperature resolution every ... [°C]	0,1
over temperature protection	class 2.0 to DIN 12880 / class 3.3 (option) / class 3.3 in TOP+

### CHAMBER

door type	double / door with viewing window (option)
interior	
STD	acid-proof stainless steel to DIN 1.4301
INOX/G	acid-proof stainless steel to DIN 1.4301
housing	
STD	powder coated sheet
INOX/G	stainless steel linen finish

# Peltier - Cooled Incubator - ILP115


## DATA SHEET

### overall dims [mm] /2/

width A	660
height B	850
depth C	770

### internal dims [mm]

width D	460
height E	540
depth F	540

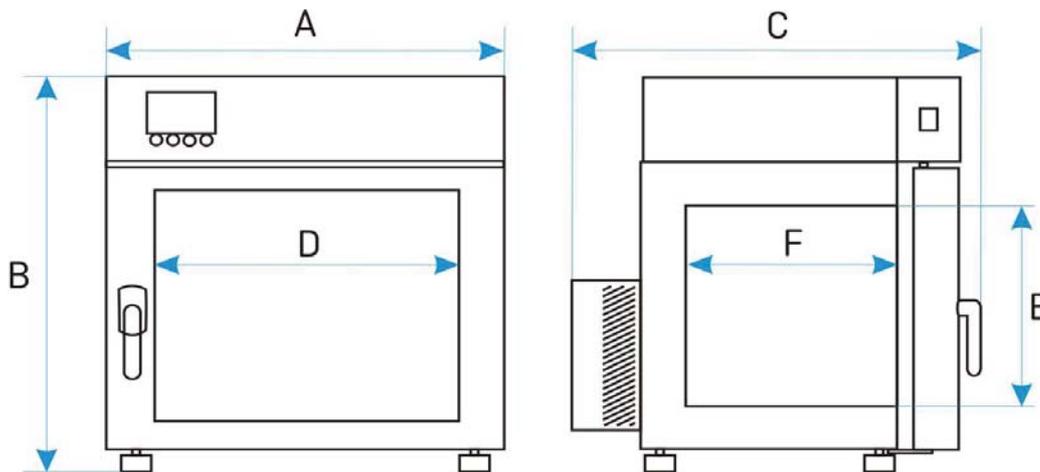

shelves (standard / max)	2/7
max shelf workload [kg] /5/	25
- reinforced shelf version (PW) /3/	50
max unit workload [kg]	60
- reinforced unit version (W) /4/	-
weight [kg]	90

### ELECTRICAL PARAMETERS

voltage*	230V 50Hz
nominal power [W]	400
warranty	24 months

all the above technical data refer to standard units (without optional accessories)

\* - 230V 60Hz, 115V 60Hz also available

1 - working capacity of chamber can be smaller

2 - depth doesn't include 50 mm of power cable

3 - reinforced shelf

4 - reinforced version

5 - on uniformly loaded surface

### OPTIONS AND ACCESSORIES

